


Select

Fixed Width Walnut

Midwest Select Grade Ripped-to-Width (R2E)

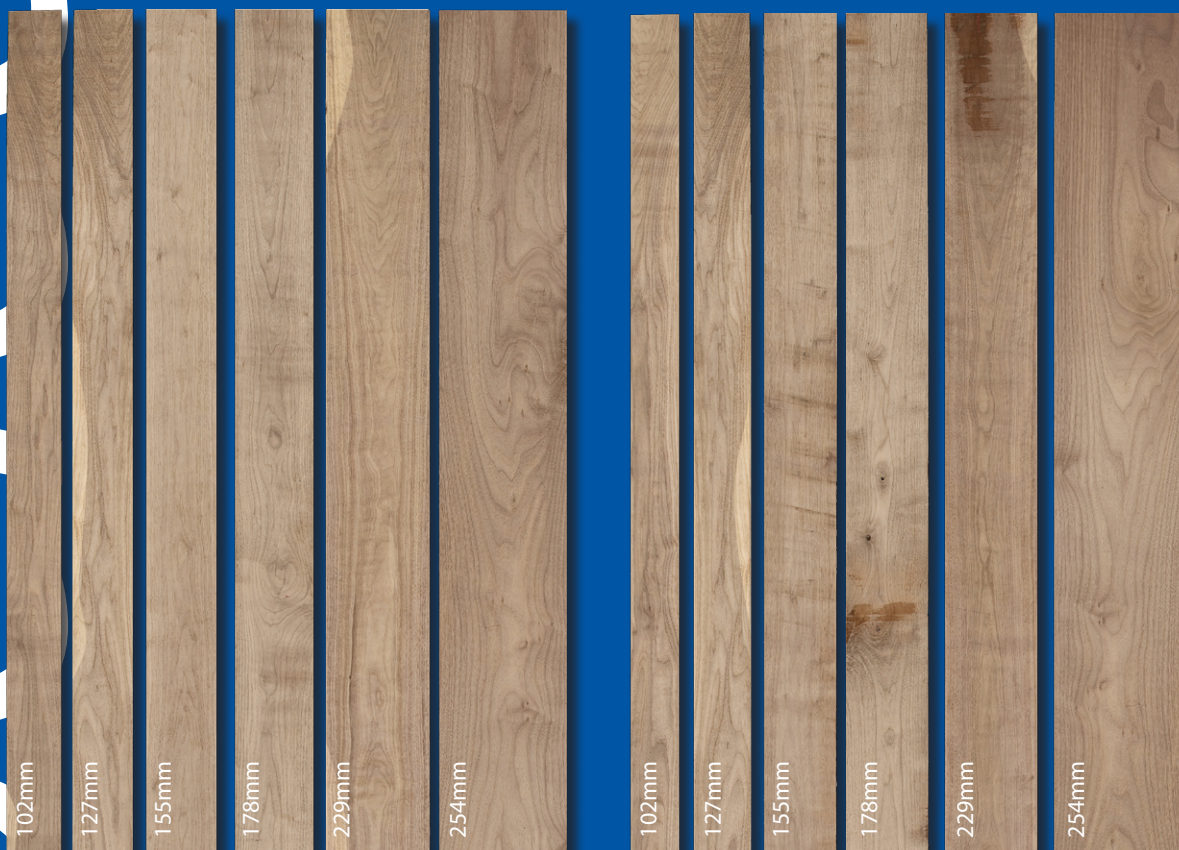

Front view of boards

Back view of boards

available widths

stock	76mm	3"
stock	89mm	3.5"
stock	102mm	4"
stock	114mm	4.5"
stock	127mm	5"
stock	140mm	5.5"
stock	155mm	6.1"
stock	165mm	6.5"
stock	178mm	7"
stock	195mm	7.7"
stock	203mm	8"
stock	216mm	8.5"
stock	229mm	9"
special order	241mm	9.5"
stock	254mm	10"
stock	267mm	10.5"
special order	279mm	11"
special order	305mm	12"

- 1.) Standard length mix is 5', 6', 7', 8', (1524mm, 1828mm, 2133mm, 2438mm) 9', 10' (2743mm, 3048mm) on special order.
- 2.) For 7-8' (2133mm, 2438mm,) only a small up charge will be necessary.
- 3.) For 8mm a significant up charge will be necessary.
- 4.) All planks packaged 1 length per bundle.



By buying FSC certified products you are supporting the growth of responsible forest management world wide.

Proudly made by wood craftsmen in Wisconsin, USA.



Select

Fixed Width Walnut

Midwest Select Grade Ripped-to-Width (R2E)



Front view of boards

Back view of boards

Midwest Hardwood Corporation is the North American leader in the production of Northern Black Walnut. Black Walnut from the Northern USA states of Wisconsin, Minnesota, Iowa, Northern Illinois and Northern Indiana provides a darker more even brown color, less sap, and tighter captured defects Black Walnut from the central United States.

Because production levels exceed 2,000m³ per month, we have the ability to supply large volumes of ripped-to-width Northern Black Walnut in our own Select Grade as defined below. We market our own Select Grade, which is based on an enhanced NHLA FAS/1F grade, a Premium Grade sawn from veneer logs, and our Natural Grade which is sawn from the center of Northern Black Walnut logs in order to provide a heavy heartwood, character marked, natural-looking product. Our stock rip-to-width is perfect for single strip flooring manufacturers making engineered flooring.

Midwest's Select Grade Walnut Planks are upgraded from FAS/1F Walnut lumber graded according to the NHLA grading rules. We rip the planks trimming end split and any large defects in the last lineal foot of the board. When ripping we minimize edge knots and provide a product that is nearly square edged (maximum wane is 6mm x 6mm x 300mm) in the occasional plank. Sap is limited due to our Northern-harvesting region, however the product allows limited sap as pictured above. Defects are limited to the occasional live knot with a maximum diameter of 52mm with most defects measuring 26–32mm. Occasional sound, solid pin knots up to 8mm are also allowed. This product comes from sawing grade logs and is priced significantly below the Premium Grade product sawn exclusively from veneer grade logs. This is the product we export in large volumes to European engineered flooring manufacturers

9540 83rd Ave North, Maple Grove, MN 55369 USA
 Phone: +1 (763) 425-8700 Fax: +1 (763) 391-6740
 Email: rickbarrett@midwesthardwood.com
 Web: www.midwesthardwood.com



10015 0708